


# Plynový píst STANDARD


ozn.: D5. STA. \_ \_ \_ . 11

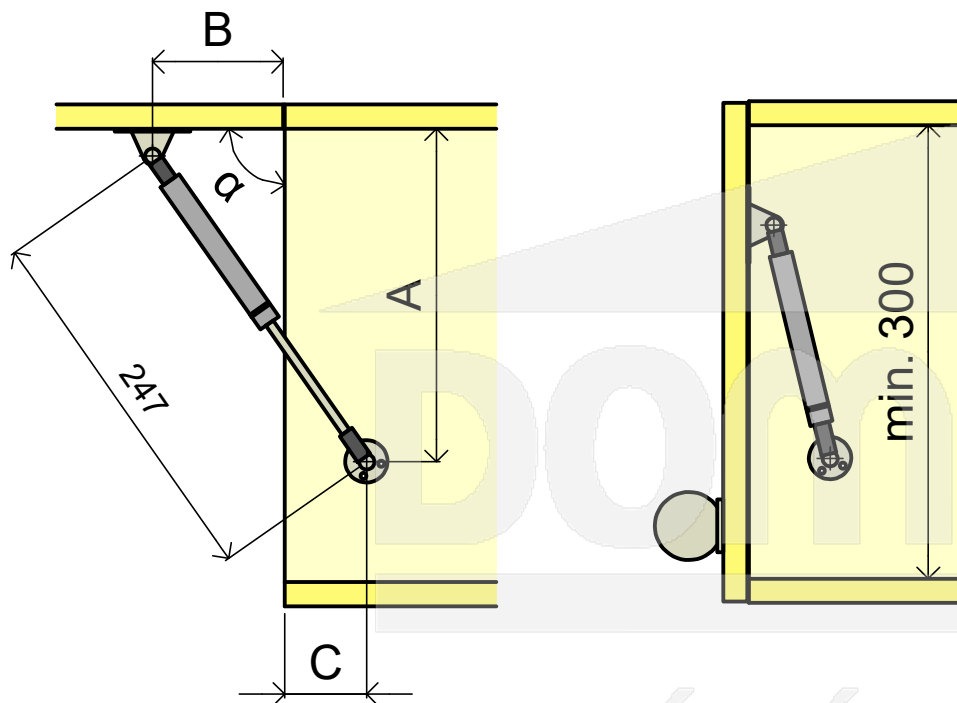

Jakou zvolit sílu pístu :

| výška<br>dvířek (mm) | šířka dvířek (mm) |           |           |           |
|----------------------|-------------------|-----------|-----------|-----------|
|                      | 400               | 600       | 900       | 1200      |
| 300                  | 1 x 60 N          | 1 x 80 N  | 2 x 60 N  | 2 x 80 N  |
| 350                  | 1 x 80 N          | 2 x 50 N  | 2 x 80 N  | 2 x 100 N |
| 400                  | 2 x 50 N          | 2 x 60 N  | 2 x 80 N  | 2 x 120 N |
| 450                  | 2 x 60 N          | 2 x 80 N  | 2 x 100 N | 2 x 150 N |
| 500                  | 2 x 80 N          | 2 x 80 N  | 2 x 120 N | -         |
| 550                  | 2 x 80 N          | 2 x 100 N | 2 x 150 N | -         |
| 600                  | 2 x 100 N         | 2 x 120 N | -         | -         |
| 650                  | 2 x 100 N         | 2 x 150 N | -         | -         |

Doporučené hodnoty pro dřevotřískovou desku tloušťky 18 mm.

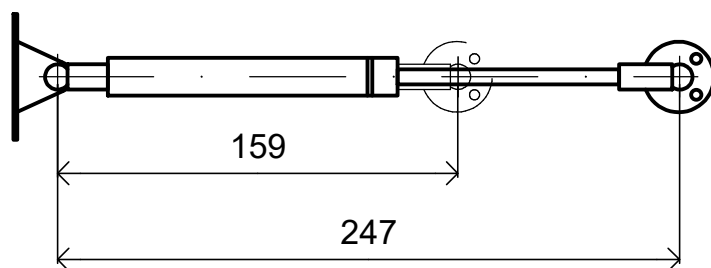

| $\alpha$ | A (mm) | B (mm) |
|----------|--------|--------|
| 100°     | 220    | 80     |
| 90°      | 230    | 90     |
| 80°      | 240    | 100    |


C = 54 mm

| $\alpha$ | A (mm) | B (mm) |
|----------|--------|--------|
| 75°      | 100    | 253    |
| 90°      | 90     | 248    |
| 110°     | 80     | 243    |


C = 25 mm

# Kotvící prvky plynových vzpěr

úchyt do kovového  
rámečku

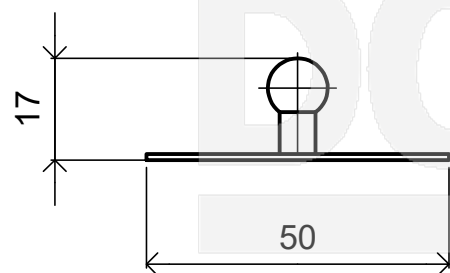

úchyt do dřevěných  
dvířek

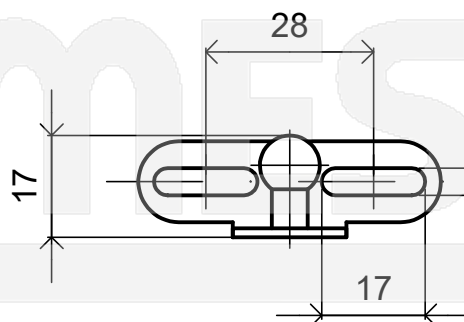

úchyt do korpusu

